


Model No's.

FDC4-1HR, FDC4-1HRT Fan Panels for Half Rack

- **Optional thermostat probe controls fan operation**

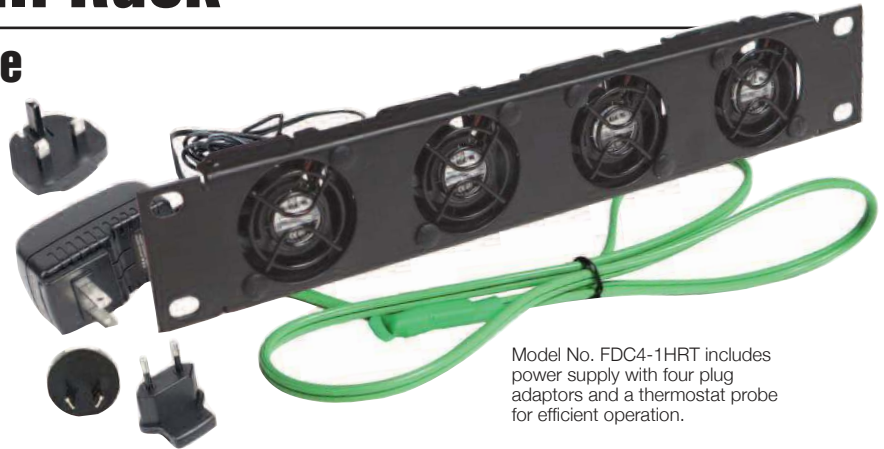

Model No. FDC4-1HRT includes power supply with four plug adaptors and a thermostat probe for efficient operation.

Rackmount fan panel for Lowell half rack (LHFR Series) features four fans (1.57" dia.) and power supply with four plug adaptors. An optional thermostat probe controls fan operation, automatically activating fans when ambient temperature reaches 86°F and deactivating them when temperature reaches 72°F. This power saving feature ensures efficient operation while saving wear and tear on the unit.

Features

- **Panel:** 1.75 (1U) x 10.375 x 1.625 inches [45 x 264 x 41mm] steel panel for installation in Lowell Half Rack. Smooth black powder epoxy finish.
- **Fans:** Four fans with fan guards
- **Fan Diameter:** 1.57 in. [40mm]
- **Total Airflow Rating:** 36cfm
- **Total Noise Rating:** 38dB
- **Power Required:** 9.6W
- **Power Supply:** with 6-ft. cord. Input 100-240VAC. Output 24VDC, 500mA. Includes 4 plug adaptors (NEMA 1-15 for North America, CEE 7/16 for central Europe, BS1363 for U.K., AS3112 for Australia, New Zealand). UL Listed.

A&E Specifications

The fan panel for a half rack shall be Lowell Model No. _____. Housing shall measure 1.75 (1U) x 10.375 x 1.625 inches [45 x 264 x 41mm] and have a black powder epoxy finish. The panel shall include four fans, each with a 1.57 in. [40mm] diameter. Total airflow rating is 36cfm; total noise rating is 38dB. The unit shall include a UL Listed power supply with four plug adaptors—NEMA 1-15 for North America, Schuko CEE 7/16 for central Europe, BS1362 for the U.K. and AS3112 for Australia/New Zealand. It shall require 9.6 watts of power.

The fan panel shall also include a thermostat probe to control fan operation, which shall automatically activate fans when ambient temperature reaches 86°F [30°C] and deactivate them when temperature reaches 72°F [22.2°C].

Model Numbers

Model No.	Description	Qty of Fans	Thermostat Probe	Total Airflow Rating	Total Noise Rating	Power Required
FDC4-1HR	Fan panel for half rack	4	----	36cfm	38dB	9.6 watts
FDC4-1HRT	Fan panel for half rack	4	yes	36cfm	38dB	9.6 watts