




Includes a Graphite Grey laminate top with rubber edge molding, which attaches to (and hangs over) the rack's steel top.



### features.

- **Panel Space:** 24U or 42.125" [1070]
- **Height:** 48.125" [1222] rack  
50.35" [1279] rack w/top & base
- **Depth:** 32.00" [813] rack  
33.94" [862] rack w/top & base  
29.34" [745] usable
- **Width:** 23.06" [586] rack  
24.57" [624] rack w/top & base
- **Description:** The portable presentation rack is ideal for educational or professional training facilities, small offices, or similar venues requiring mobile security for electronics. Includes front and rear doors with key locks, Graphite Grey laminate top with rubber edge molding and mobile base with an inner platform that is flush with bottom rack space.
- **Construction:** Fully welded certified U.S. steel, 16-gauge frame and 14-gauge bottom reinforced at all load-bearing junctions. Black wrinkle powder epoxy finish. Beveled edge corners.
- **Front:** Reversible (left or right swing) surface-mount smoked plexiglass door, with recessed handle and key lock, extends 1" from frame. Vents in frame above and below door.
- **Rear:** Reversible recessed door with top/bottom vents and key lock. Removable knockout panels in frame above and below door feature combination EKO's for conduit (1/2"-3/4" and 1"-1-1/2"). Top panels also include KO's for wireless antennae (1/2"). Removable blank project panel in frame below door.
- **Sides:** Welded sides feature upper and lower vents.
- **Bottom:** Mobile base with inner platform that is flush to bottom rack space and can support heavy equipment. Central opening for wire management. 3" casters.
- **Top:** Premium Graphite Grey laminate top with rubber edge molding attaches to (and overhangs) the rack's steel top. The premium top measures 1"H x 33.94"D x 24.57"W.
- **Cable Management:** Combination knockouts in rear panels. Generous space (nearly 2") for managing wire between front rails and front-to-rear rail supports.
- **Rack Rails (24U fully adjustable):** Two pairs 11-gauge steel 10-32 threaded rails with black finish and numbered RU increments.
- **Hardware:** Black pilot point screws with captive washers for quick installation.
- **Compliance:** EIA/TIA compliant. RoHS compliant. UL 2416 Listed in U.S.A. and Canada.
- **UL Listed Load Capacity:** 900 lbs. [408 kg]
- **Optional:**
  - Additional pair of 24U rails. #RRD-24.
  - Pair of panels for specialty connectors (Neutrik D series, Switchcraft HPC or E series) replace rear knockout panels. #KOP-N.
  - One panel with two 15A outlets and 6' cord replaces rear knockout panel. #KOP-AC1502.

### a&e specifications.

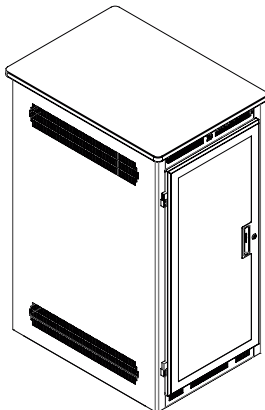

The EIA/TIA compliant, portable 19" equipment rack shall be Lowell model #LPPR-2432 with rack dimensions of 48.125"H x 32.00"D x 23.06"W (without base or laminate top); usable height of 24 rack units, and usable depth of 29.34". It shall include a mobile base with casters. Rack construction shall be fully welded certified U.S. steel with 16-gauge frame and 14-gauge bottom reinforced at load-bearing junctions, all with black wrinkle powder epoxy finish. Welded sides shall feature vents. The rack shall include a recessed rear door with upper/lower vents and key lock, and a smoked plexiglass steel surface-mount front door with integral handle and key lock. The rear frame shall feature removable knockout panels above and below door with 1/2"-3/4" and 1"-1-1/2" EKO's for conduit—upper panels shall also include 1/2" KO's for wireless antennae. One panel below the door shall be blank. The front frame shall feature vents above and below the door. Rack top shall be solid steel and include an overhanging laminate top with rubber edge molding (1"H x 33.94"D x 24.57"W). The rack shall

include two pairs of (24U) adjustable 11-gauge steel rails tapped 10-32 on 19" E.I.A. spacing with black finish and numbered rack unit increments. The UL 2416 Listed rack shall be manufactured in the U.S.A. with load capacity of 900 lbs.

#### Optional

- The rack shall include an additional pair of 24U rails, #RRD-24.
- The rack shall include a pair of knockout panels for Neutrik connectors, #KOP-N.
- The rack shall include a knockout panel with two 15A outlets and 6' cord, #KOP-AC1502.

### Model summary

Model No.	Rack Units	Rack Depth (without top/base)	Overall Depth (with top/base)	Usable Depth	Rack Width (without top/base)	Overall Width (with top/base)	Rack Height (without top/base)	Overall Height (with top/base)
▶ LPPR-2432	24 U	32.00 [813]	33.94 [862]	29.34 [745]	23.06 [586]	24.57 [624]	48.13 [1222]	50.35 [1279]

Rounded dimensions – inches and [mm] 1U = 1.75"

\*Rounded rack dimensions without overhanging laminate top.



