

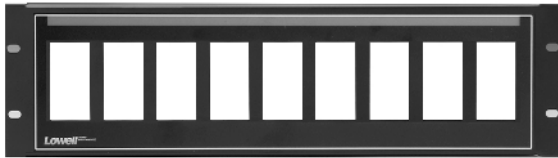


rackmount panel punched for low voltage (decorator style) devices




Model #D9P-ID-3



Pocket-ID™ allows a paper label to be added



Rear lacing flange aids cable management



Optional DBB Series blank filler plates are used to plug unused positions.

features

- **Description:** Steel rackmount panel with black finish is pre-punched to hold up to nine (9) low voltage (decorator style) devices.
- **Construction:**
 - 16-gauge certified U.S. steel
 - 19"W x 3U
 - Nine (9) punches to mount low-voltage (decorator style) devices vertically. Cutout spacing is 1.812" (standard NEMA gang spacing, center to center).
 - Rear lacing flange for cable/wire management
 - Pocket-ID™ plastic overlay will hold a 1/2"H paper label (not included). Download label template at Lowellmfg.com (PocketID-B)
- **Finish:** Smooth black semi-gloss powder epoxy finish
- **Origin:** Made in the U.S.A.
- **Hardware:** Included
- **Optional: (order separately)**
 - DBB Series: Blank filler plates are used to plug unused positions.
 - Device suggestions listed on pg. 2

a&e specifications


The rackmount panel for mounting low-voltage decorator style devices shall be Lowell Model #D9P-ID-3. It shall be formed steel construction (19"W x 3U) with nine (9) punched cutouts and a smooth black semi-gloss powder epoxy finish. It shall include hardware, a rear lacing flange for wire management, and a plastic overlay to hold a paper label (not included).

Lowell punched panel overview

Model No.	Description	Panel Space	Overall Width	No. of Punches	Device Mounted Direction	Pocket-ID™ Label Area	Carton Pack
D3P-ID-1	Rack panel for decorator device	1U	19.00 [483]	3	horizontal	yes	1
D3P-ID-2	Rack panel for decorator device	2U	19.00 [483]	3	horizontal	yes	1
D4P-1	Rack panel for decorator device	1U	19.00 [483]	4	horizontal	---	1
D8P-ID-3	Rack panel for decorator device	3U	19.00 [483]	8	vertical	yes	1
D9P-ID-3	Rack panel for decorator device	3U	19.00 [483]	9	vertical	yes	1
LVC8P-ID-2	Rack panel for volume controls	2U	19.00 [483]	8	---	yes	1
N10P-ID-1	Rack panel for Neutrik-D/Switchcraft-E	3U	19.00 [483]	10	---	yes	1
SG6P-3	Rack panel for standard (1g) wall plate device	3U	19.00 [483]	6	vertical	---	1
Blank Filler Plates (for decorator style punches, unused positions)							
DBB-4	Blank filler plate (4 pk.)						1
DBB-50	Blank filler plate (50 pk.)						1
DBB-100	Blank filler plate (100 pk.)						1

Dimensions = inches [mm]; 1U = 1.75"



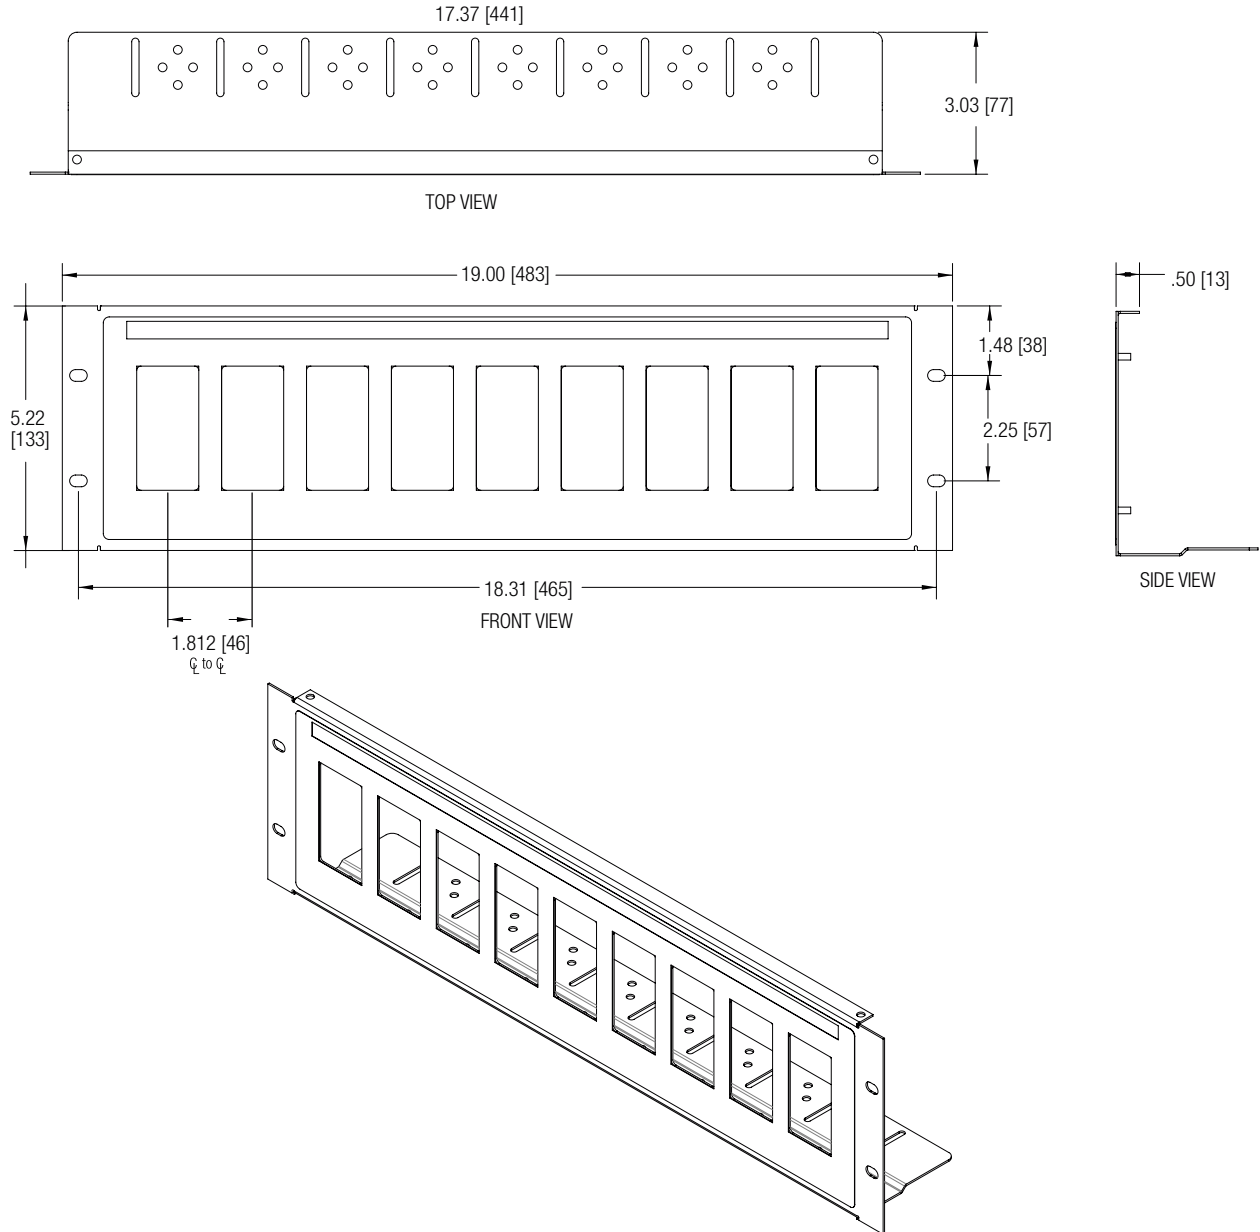

- **Optional devices: (order separately):** Volume controls and switches are typical devices mounted in this panel. Note: Some VCs include a wall plate that must be removed before mounting to panel. Model #200LVC-RMDB is a wide-body that requires a blank space on either side (max. 4 per panel).
 - 25LVC-DB: 25W mono VC, 3dB step
 - 100LVC-DB: 100W mono VC, 3dB step
 - 100LVC-PA-DB: 100W mono VC with priority relay, 3dB step
 - KL100-DB: 100W VC with key lock, 3dB step
 - 200LVC-RMDB: 200W rackmount VC, 3dB step (wide body)
 - RPSB-KP: maintained closure remote switch, key, 1 LED
 - RPSB-MKP: momentary closure remote switch, key, 1 LED
 - RPSB2-MKP: momentary closure remote switch, key, 2 LEDs
 - 50LVC-DB: 50W mono VC, 3dB step
 - 10015LVC-DB: 100W mono VC, 1.5dB step
 - 50LVCS-DB: 50W 8ohm stereo VC 3dB step
 - KL100-PA-DB: 100W VC with key lock, priority relay, 3dB step
 - RPSB-P: maintained closure remote switch, rocker, 1 LED
 - RPSB-MP: momentary closure remote switch, rocker, 1 LED
 - RPSB2-MP: momentary closure remote switch, rocker, 2 LEDs
 - RPSB-KP-ASM: maintained closure remote (key) switch, 1 LED (for sequencers with ASM mode)