




features

- **Panel Space:** 8U or 14.00" [356]
- **Overall Height:** 17.84" [453]
- **Overall Depth:** 21.00" [533]
- **Overall Width:** 19.21" [586]
- **Description:** Slim open-frame rack for 19" equipment is made to fit where a standard rack may not, such as inside millwork or under a counter. A variety of options make it suitable for additional applications. Ships unassembled.
- **Construction:**
 - 14-gauge certified U.S. steel frame
 - 11-gauge corner post rails tapped 10-32. Bi-directional numbered RU increments allow rail installation in either direction.
 - Smooth black powder epoxy finish
 - Upper and lower front vents
 - Steel top with vents (top vents will accept an optional single fan kit).
 - Open sides with multiple obrounds for easy cable management
 - Large opening in base (10.50"W x 9.00"D)
 - Combination knockouts (1/2"–3/4") in rear for cable management
 - 3/8"-16 threaded T-nuts for (optional) leg levelers
- **Hardware:** Assembly and panel mounting hardware (hex nuts, flat-head screws)
- **Compliance:** EIA/TIA compliant. RoHS compliant.
- **Load Capacity:** 400 lbs.
- **Optional:**
 - Front door (LXR-FD Series)
 - Rear access cover that opens from top (#LXR-RAC8)
 - Side panels with vents (#SDV-821)
 - Leg levelers (#LL)
 - Protective runner kit for slide-in applications (#PRK)
 - Zero space shelf for wide equipment (#LXR-NS21)
 - Mobile base w/non-locking swivel casters (#LXR-MB21)
 - Mobile base w/non-locking swivel casters for fine floors (#LXR-MB21F)
 - Set of 4 swivel casters, non-locking (#LXR-C3S)
 - Set of 4 swivel casters, 2 locking (#LXR-C3SL)
 - Set of 4 swivel casters for fine floors, non-locking (#LXR-C3SF)
 - Set of 4 swivel casters for fine floors, 2 locking (#LXR-C3SFL)




a&e specifications

The EIA/TIA compliant 19" equipment rack shall be Lowell model #LXR-821 with overall dimensions of 17.84"H x 21.00"D x 19.21"W and usable height of 8 rack units. Rack construction shall be certified U.S. steel—16-gauge frame with 14-gauge corner post rails tapped 10-32—with smooth black powder epoxy finish. It shall feature combination knockouts (1/2"–3/4") in the rear and side obrounds for cable management. The bottom opening shall measure 10.50" x 9.00". The rack shall be manufactured in the U.S.A. with a load capacity of 400 lbs. It shall ship unassembled.

Optional

- The rack shall include solid steel front door with key lock model #LXR-FD8.
- The rack shall include smoked plexiglass surface-mount front door with key lock model #LFD-8P.
- The rack shall include rear access cover with key lock model #LXR-RAC8.
- The rack shall include a pair of side panels model #SDV-821.
- The rack shall include a set of four leg levelers model #LL.
- The rack shall include protective runner kit for slide-in applications model #PRK.
- The rack shall include zero space shelf model #LXR-NS21
- The rack shall include a mobile base with swivel casters model #LXR-MB21, which shall raise rack height 3.95".
- The rack shall include a mobile base with fine floor swivel casters model #LXR-MB21F, which shall raise rack height 4.06".
- The rack shall include a set of 4 swivel casters (non-locking) model #LXR-C3S.
- The rack shall include a set of 4 swivel casters (2-locking) model #LXR-C3SL.
- The rack shall include a set of 4 swivel casters with fine-floor tread (non-locking) model #LXR-C3SF.
- The rack shall include a set of 4 swivel casters with fine-floor tread (2-locking) model #LXR-C3SFL.

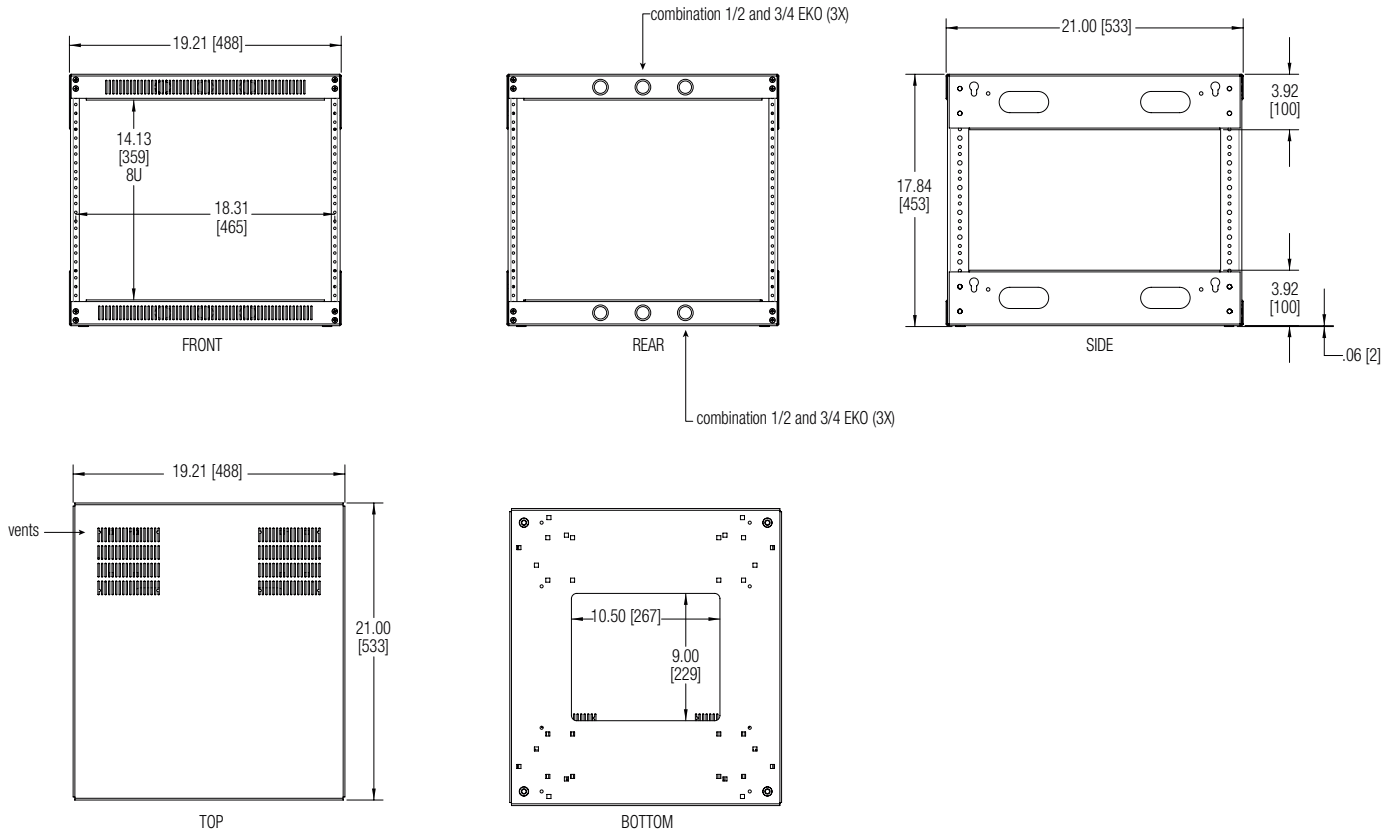

LXR series summary

| Model No. | Rack Units | Overall Depth | Overall Height | Usable Height | Overall Width | Bottom Opening Depth | Bottom Opening Width | Corner Post Rails | Side Brackets |
|-----------|------------|---------------|----------------|---------------|---------------|----------------------|----------------------|-------------------|---------------|
| ▶ LXR-821 | 8 U | 21.00 [533] | 17.84 [453] | 14.00 [356] | 19.21 [488] | 9.00 [229] | 10.50 [267] | 4 | ----- |
| LXR-1421 | 14 U | 21.00 [533] | 28.34 [720] | 24.50 [622] | 19.21 [488] | 9.00 [229] | 10.50 [267] | 4 | ----- |
| LXR-2221 | 22 U | 21.00 [533] | 42.34 [1075] | 38.50 [978] | 19.21 [488] | 9.00 [229] | 10.50 [267] | 4 | ----- |
| LXR-3021 | 30 U | 21.00 [533] | 56.34 [1431] | 52.50 [1334] | 19.21 [488] | 9.00 [229] | 10.50 [267] | 4 | 2 |
| LXR-3821 | 38 U | 21.00 [533] | 70.34 [1787] | 66.50 [1689] | 19.21 [488] | 9.00 [229] | 10.50 [267] | 4 | 2 |
| LXR-4421 | 44 U | 21.00 [533] | 80.84 [2053] | 77.00 [1956] | 19.21 [488] | 9.00 [229] | 10.50 [267] | 4 | 2 |
| LXR-826 | 8 U | 26.25 [667] | 17.84 [453] | 14.00 [356] | 19.21 [488] | 12.00 [305] | 10.50 [267] | 4 | ----- |
| LXR-1426 | 14 U | 26.25 [667] | 28.34 [720] | 24.50 [622] | 19.21 [488] | 12.00 [305] | 10.50 [267] | 4 | ----- |
| LXR-2226 | 22 U | 26.25 [667] | 42.34 [1075] | 38.50 [978] | 19.21 [488] | 12.00 [305] | 10.50 [267] | 4 | ----- |
| LXR-3026 | 30 U | 26.25 [667] | 56.34 [1431] | 52.50 [1334] | 19.21 [488] | 12.00 [305] | 10.50 [267] | 4 | 2 |
| LXR-3826 | 38 U | 26.25 [667] | 70.34 [1787] | 66.50 [1689] | 19.21 [488] | 12.00 [305] | 10.50 [267] | 4 | 2 |
| LXR-4426 | 44 U | 26.25 [667] | 80.84 [2053] | 77.00 [1956] | 19.21 [488] | 12.00 [305] | 10.50 [267] | 4 | 2 |

Rack dimensions (rounded) – inches and [mm]; 1U = 1.75"