


under-desk rack with sloped front for easy view while seated
12U x 25"D x 23"W

features.



- **Panel space (angled):** 12U or 21.00" [533]
- **Height:**
Rack: 25.98" [660]
Rack w/casters: 26.88" [683]
- **Depth:**
Rack (at base): 25.52" [648]
- **Width:**
Rack: 23.00" [584]
- **Description:** Rollout studio rack is ideal for under desk applications. Its ergonomic design offers 12U mounting space on a 15 degree slope, which allows for easy viewing of equipment from a seated position. Swivel casters provide convenient rollout access to mounted controls. Includes front door and rear access cover.
- **Construction:** Fully welded 18-gauge certified U.S. steel construction reinforced at all loadbearing junctions. Black wrinkle powder epoxy finish.
- **Front:** Hideaway front door with vents and key lock opens from top, slides into base for storage. Cutouts in frame above door accept optional decorator style switches, allowing easy access without opening the door.
- **Rear:** Removable rear access cover with two cable entry ports opens from the top. Lock is keyed differently than front door.
- **Sides:** Welded steel sides feature upper and lower vents, recessed handles.
- **Top:** Welded solid steel top.
- **Base:** Welded solid steel base includes 4 swivel casters for pullout access.
- **Mounting Rails (fixed position):** Fixed position 11-gauge steel front rails (tapped 10-32) are numbered on E.I.A. spacing for easy set-up. Rear mounting holes punched on E.I.A. spacing include include 10-32 Tinnerman clips.
- **Cable Management:** Two rear cable entry ports.
- **Hardware:** Pilot point screws with captive washers.
- **Compliance:** EIA/TIA compliant. RoHS compliant.
- **Load Capacity:** 250 lbs.

a&e specifications.

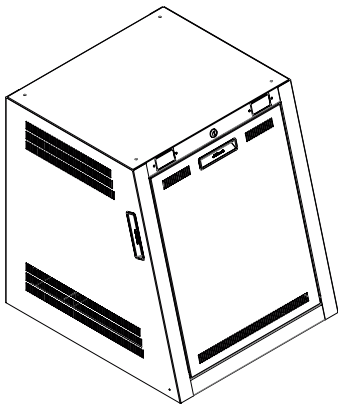

The E.I.A./T.I.A. compliant rack shall be Lowell #LPSR-1226 with overall dimensions of 25.98"H (without casters) x 23"W x 25.52 "D (at base). Panel space shall be 12U on a 15 degree slope, with each level providing a different usable depth. Construction shall be fully welded 18 gauge steel reinforced at all loadbearing junctures, with black wrinkle powder epoxy finish. The rack shall include integral side handles, swivel casters, hideaway front door with keyed lock, rear access cover with keyed lock and two rear cable entry ports, two front cutouts with cover plates for optional decorator style switches (not included), 1 pair fixed position front mounting rails tapped 10-32, and rear mounting holes with 10-32 Tinnerman clips. Load capacity shall be 250 lbs. Vents for natural heat dissipation shall be provided on sides and front door.

LPSR series summary

Model No.	Panel Space	Rack Depth (at base)	Rack Height (without casters)	Rack Height (with casters)	Rack Width	Front Mtg Rails	Rear Mtg Holes*	Load Capacity	Premium Laminate Top**
▶ LPSR-1226	12 U	25.52 [648]	25.58 [660]	26.88 [683]	23.00 [584]	1 pr	yes	250 lbs	---
LPSR-1226GT	12 U	25.52 [648]	25.58 [660]	26.88 [683]	23.00 [584]	1 pr	yes	250 lbs	included

*Rear holes punched on E.I.A. spacing include (10-32) Tinnerman clips

**Dimensions provided in chart do not include laminate top.



