



### features . . . . .


- **Panel Space:** 44U or 77.00" [1956]
- **Overall Height:** 83.125" [2111]
- **Overall Depth:** 32.00" [813]
- **Overall Width:** 22.00" [559]
- **Material:** Fully welded certified U.S. steel, 16-gauge frame with seamless side frame construction, 14-ga. top, and 14-ga. bottom reinforced at load-bearing junctions for robust support, strength equivalent to 11-ga. steel. Durable black wrinkle powder epoxy finish.
- **Front:** Frame nutserts are ready to add optional surface-mount door (left or right swing). Order front door separately.
- **Rear:** Removable knockout panel in frame above and below door. Combination EKO's for conduit (1/2"–3/4" and 1"–1-1/2") and KO's for wireless antennae (1/2"). Standard model includes recessed rear door with key lock (left or right swing). Rear door can be omitted by placing "LRD" (less rear door) suffix in model no.
- **Sides (open access):** Each side features 8 lacing bars on 7" centers for quick tie-n-slide lacing of video cable bundles, plus 4" x 1.5" obround openings along base for cabling between racks. Optional side panel increases overall width 1" per side.
- **Configurable Top (with closure panels):** 10U opening features riveted 10-32 threaded rails on 19" E.I.A. spacing. Includes two black closure panels (3U, 7U) which can be replaced with optional 19" panels (fan, vent, etc.).
- **Bottom (open access):** Includes 10-32 threaded grounding stud in corner, 3/8"-16 threaded T-nuts for (optional) leg levelers, and holes for anchor bolts (by others). Opening is 27.88"D x 18.89"W.
- **Rails (fully adjustable):** Two pairs of 11-ga. steel 10-32 threaded rails on E.I.A. spacing with numbered RU increments (rails mount in either direction). Black finish. Clearance for wire management from front rail to outside frame (1.5") and from front rail to (optional) surface-mount door (2.25").
- **Hardware:** Black pilot point screws with captive washers for quick installation. (50)
- **Compliance:** EIA/TIA compliant. RoHS compliant. UL 2416 Listed in U.S.A. and Canada.
- **UL Listed Load Capacity:** 3150 lbs. [1429 kg]
- **Optional:**
  - Front door
  - Side panels
  - Mobile base
  - Ganging hardware
  - Fully-vented rear door
  - Additional rails
  - Leg levelers

### a&e specifications . . . . .


The EIA/TIA compliant 19" gangable equipment rack shall be Lowell model #LGVR-4432 with overall dimensions of 83.125"H x 32.00"D x 22.00"W; usable height of 44 rack units, and usable depth of 29.34". Rack construction shall be fully welded certified U.S. steel with 16-gauge frame, 14-ga. top, and 14-ga. bottom reinforced at load-bearing junctions, all with black wrinkle powder epoxy finish. Open sides shall feature eight lacing bars and obround openings along bottom. The rack shall include a recessed rear door with key lock, combination knockouts for conduit wiring above and below door (1/2"–3/4" and 1"–1-1/2" EKO's), and knockouts for wireless antennae (1/2" KO's). The front shall feature provisions to accept an (optional) surface-mount door with left or right hand swing. The top shall feature a 10U opening with riveted 10-32 threaded rails on 19" E.I.A. spacing and solid closure panels (3U, 7U). Rack bottom shall have an opening measuring 27.88" x 18.89" and include a grounding stud. Rack shall include 2 pairs of adjustable 11-gauge steel rails tapped 10-32 on 19" E.I.A. spacing with black finish and numbered rack unit increments. The UL 2416 Listed rack shall be manufactured in the U.S.A. with a UL Listed load capacity of 3150 lbs.

#### Optional

- The rack shall include a solid steel surface-mount front door with key lock model #LFD-44.
- The rack shall include a smoked plexiglass surface-mount front door with key lock model #LFD-44P.
- The rack shall include a fully-vented surface-mount front door with key lock model #LFD-44FV.
- The rack shall include 1-pr. solid side panels model #SDP-4432.
- The rack shall include a fully-vented rear door with key lock model #LRND-44FV.
- The rack shall include mobile base model #LMNB-32, which shall add 1.25" to height.
- The rack shall include an additional pair of 44U mounting rails model RRN-44.
- The rack shall include a set of four leg levelers model #LL.
- The rack shall include ganging hardware model #RGH-40.

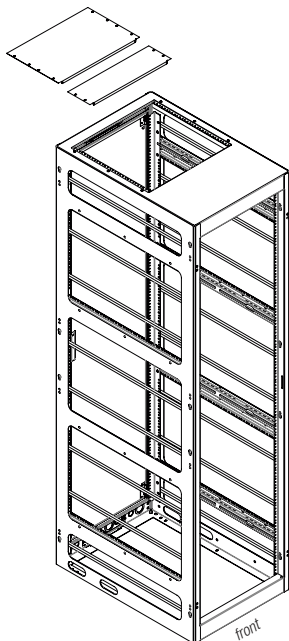

The rack includes a rear door and top closure panels (rear door can be omitted if not needed, see ordering option, pg. 2). A front door is optional, order separately.

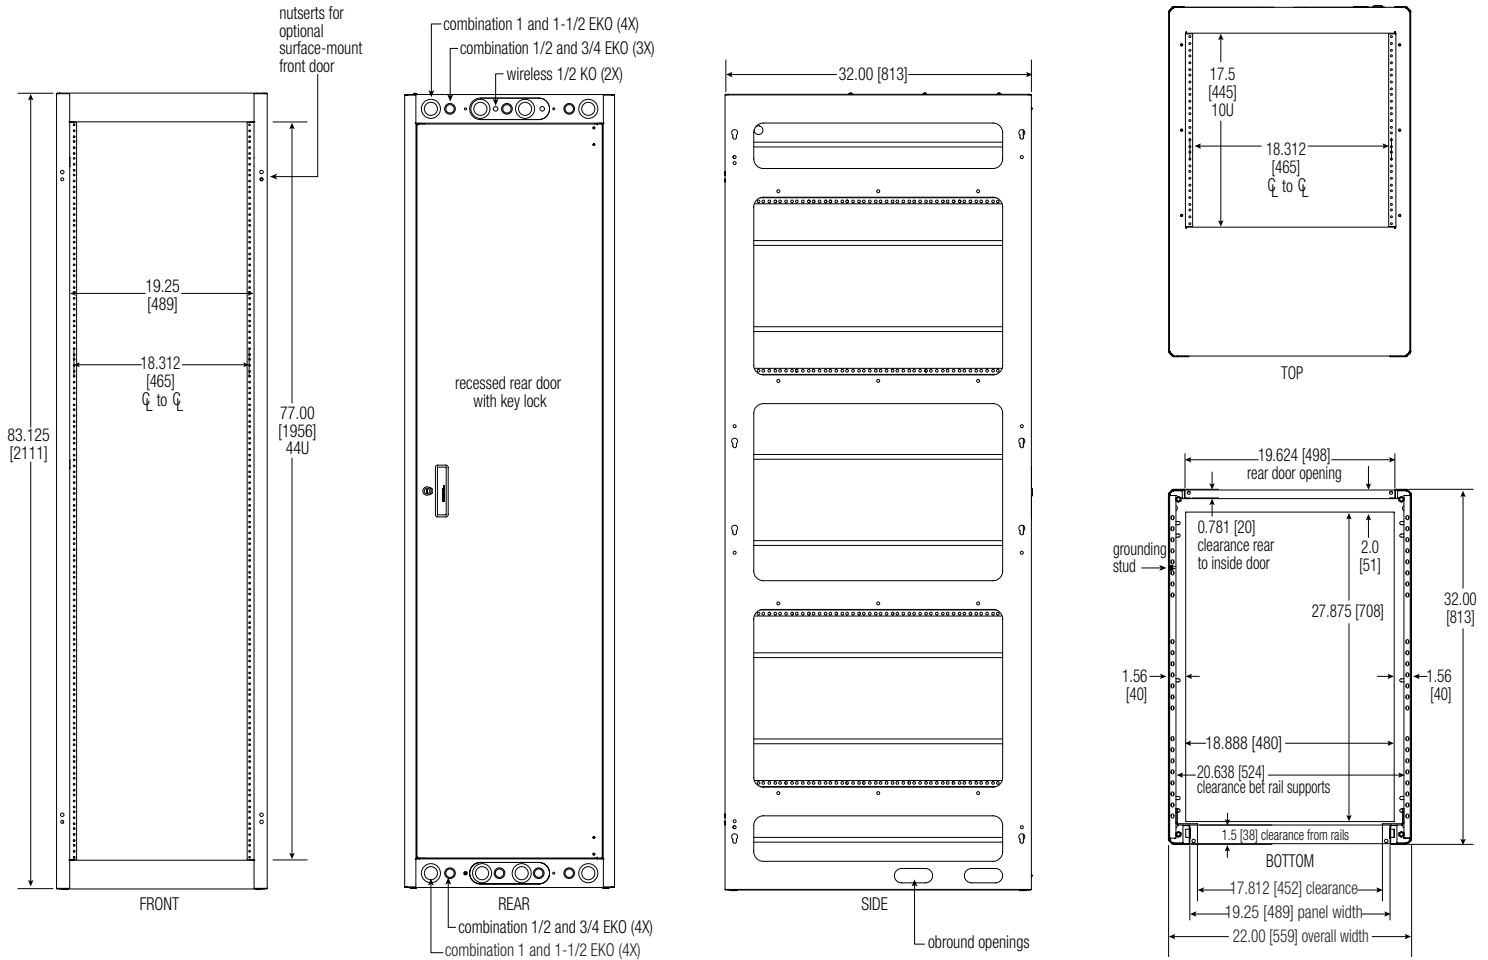

### LGVR series summary

Model No.	Rack Units	Overall Depth	Usable Depth	Overall Height	Usable Height	Overall Width	Top Opening	Bottom Opening Depth	Bottom Opening Width	Adj. Rails
<b>▶ LGVR-4432</b>	<b>44 U</b>	<b>32.00 [813]</b>	<b>29.34 [745]</b>	<b>83.13 [2111]</b>	<b>77.00 [1956]</b>	<b>22.00 [559]</b>	<b>10 U</b>	<b>27.88 [708]</b>	<b>18.89 [480]</b>	<b>2 pr</b>
LGVR-4436	44 U	36.00 [914]	33.34 [847]	83.13 [2111]	77.00 [1956]	22.00 [559]	10 U	31.88 [810]	18.89 [480]	2 pr

Rack dimensions (rounded) – inches and [mm]; 1U = 1.75"

**ORDERING OPTION:** Omit rear door by adding "LRD" to end of model number, ex. LGVR-4432-LRD

