




features

- **Panel Space:** 12U or 21.00 [533]
- **Overall Height:** 22.86" [581]
- **Overall Depth:** 11.50" [292]
- **Overall Width:** 19.06" [484]
- **Description:** Lightweight two-post stand with angled mounting rails has a small footprint with just enough rack space for small AV or IT equipment arrangements, ideal where space is limited and a full size rack is not needed. Compact design is suitable for installation on or under a desk for convenient access to mounted electronics, such as a recording front end or post production equipment, or multiple effects processors. Ships unassembled.
- **Construction:** 16-gauge certified U.S. steel side supports and front panel. 11-gauge post rails. Smooth black powder epoxy finish.
- **Installation:** Use freestanding or bolted to a desk or counter.
- **Mounting Rails:** 11-gauge steel integral (12U) post rails tapped 10-32 with numbered RU increments. Rails are angled 10 degrees for easy viewing of equipment controls from a seated position.
- **Hardware:** Includes assembly hardware and rubber feet to protect desk surface.
- **Compliance:** EIA/TIA compliant. RoHS compliant.
- **Load Capacity:** 80 lbs. [36kg]

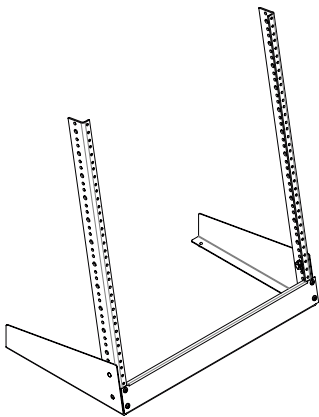

a&e specifications


The EIA/TIA compliant, two post rack stand shall be Lowell model #LRS-12 with overall dimensions of 22.86"H x 11.50"D x 19.06"W and usable height of 12 rack units on a 10 degree angle. Rack construction shall be certified U.S. steel—16-gauge side supports and front panel, and 11-gauge post rails tapped 10-32—all with smooth black powder epoxy finish. The rack shall support a load capacity of 80 lbs. It shall be manufactured in the U.S.A. and ship unassembled.

LRS series summary


| Model No. | Panel Space | Overall Depth | Overall Height | Usable Height | Overall Width | (Angled) Post Mounting Rails | Load Capacity |
|---------------|-------------|--------------------|--------------------|--------------------|--------------------|------------------------------|-----------------------|
| LRS-8 | 8 U | 11.50 [292] | 15.86 [403] | 14.00 [356] | 19.06 [484] | 2 | 80 lbs. [36kg] |
| LRS-12 | 12 U | 11.50 [292] | 22.86 [581] | 21.00 [533] | 19.06 [484] | 2 | 80 lbs. [36kg] |

Rack dimensions (rounded) – inches and [mm]; 1U = 1.75"



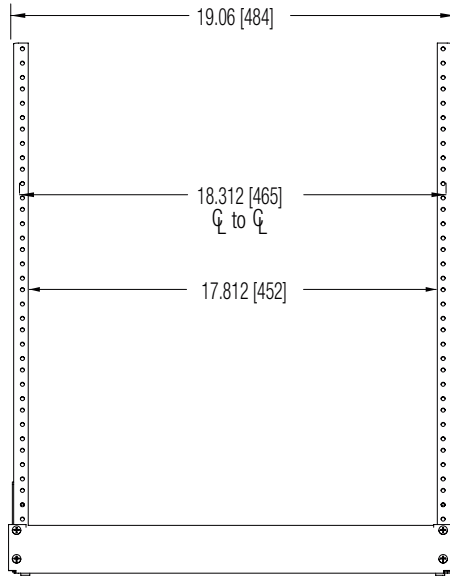

FRONT VIEW

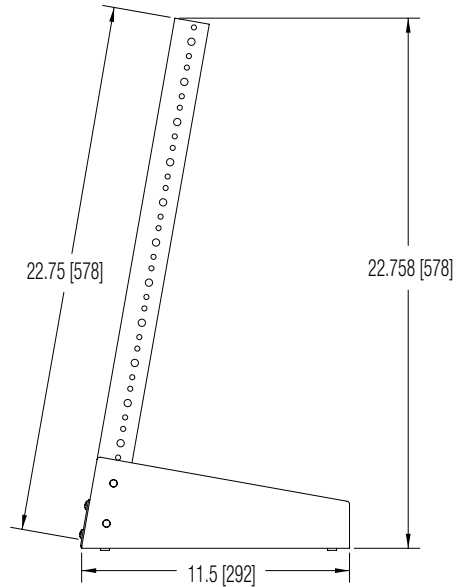

SIDE VIEW