



with domestic & global components



Model No. LT2-830-TM16-Vb 2x2 Speaker System for Tile Ceilings

- Includes 8" coaxial driver, transformer, 2x2 grille/subplate, volume backbox

Quick install speaker system for suspended tile ceilings features an 8" coaxial driver, 70V transformer, 2'x2' fine perforation grille with subplate and volume backbox. This system is ideal for foreground music.

Features

- Driver (CT830A): 8" 20W coaxial driver with 12 oz. magnet, frequency response of 57Hz-14kHz (± 6 dB), 44Hz-20kHz (± 7.6 dB) and sensitivity of 97.0dB avg. measured 1W/1M.
- Transformer (TLM-1670A): 70V transformer has primary taps at 4, 8, and 16W.
- Grille with subplate (2'x2'): Fine-perforation grille is designed to provide maximum free-air space for excellent sound transmission while maintaining an unobtrusive appearance in new or existing tile ceilings. Quick install. White finish.
- Volume Backbox: 0.8 cu.ft. steel backbox with acoustic lining enhances audio performance. Speaker leads exit through a metal clamp for fast connection—just splice connecting wires, push them inside the enclosure and tighten the clamp. Black finish.

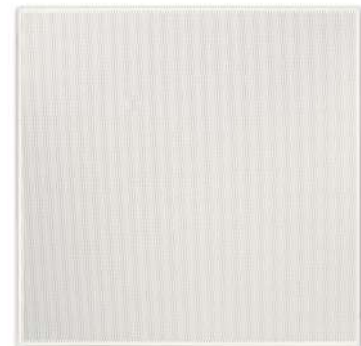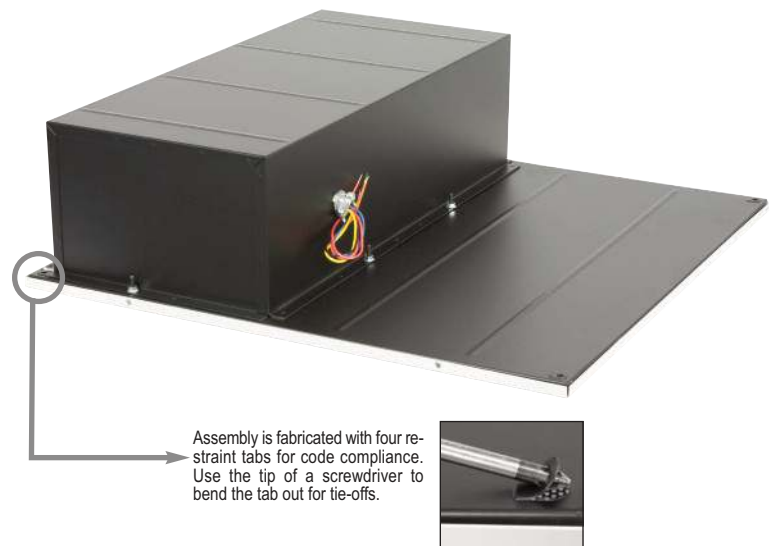

A&E Specifications

The speaker system for suspended tile ceilings shall be Lowell Model No. LT2-830-TM16-Vb. The 2'x2' system shall directly replace a 2'x2' ceiling tile. Each speaker system shall include a factory-mounted driver mounted to a subplate with a fine perforation steel grille finished in white powder epoxy. The driver shall be 8" coaxial with a power rating of 20W. It shall have a magnet weight of 12 ozs., frequency response of 57Hz-14kHz (± 6 dB), 44Hz-20kHz (± 7.6 dB) and sensitivity of 97.0dB avg. measured 1W/1M. The mounted transformer shall be

70V with primary taps at 4, 8, and 16W. The system shall include a steel backbox (0.8 cu.ft.) with acoustic lining. Driver leads exit through a metal clamp.

Driver Specifications (half space)

| Driver No. | Size | Power Rating | Type | Ceramic Magnet | Frequency Response | Dispersion @2000Hz -6dB | Voice Coil Impedance | Voice Coil Diameter | Sensitivity 1W / 1M | Max SPL** | Depth | Weight |
|------------|------|--------------|---------|----------------|--|-------------------------|----------------------|---------------------|---------------------|-----------|-------|----------|
| CT830A | 8" | 20W | Coaxial | 12 oz. | 57Hz-14kHz (± 6 dB) 44Hz-20kHz (± 7.6 dB) | 80 degrees conical | 8 ohms | 1" | 97.0dB Avg | 110.0dB | 3.2" | 2.4 lbs. |

** Calculated value 1M @ driver power rating.
Additional technical information is available on the spec sheet for driver No. CT830A

Heard Everywhere Since 1947

Drawings

