



100%
CERTIFIED
US STEEL



MADE IN
THE U.S.A.



EIA
TIA
COMPLIANT




RoHS
COMPLIANT



features

- **Panel Space:** 21U or 36.75" [933]
- **Overall Height:** 42.875" [1089]
- **Overall Depth:** 22.00" [686]
- **Overall Width:** 23.06" [586]
- **Construction:** Fully welded certified U.S. steel, 16-gauge frame with seamless side frame construction and 14-ga. bottom reinforced at load-bearing junctions for robust support, strength equivalent to 11-ga. steel. Black wrinkle powder epoxy finish. Beveled edge corners front and rear.
- **Front:** Upper and lower vents. Frame nutserts are ready to add optional surface-mount door (left or right swing). Order front door separately.
- **Rear:** Laser-cut knockout panels in frame above and below door feature combination EKO's for conduit (1/2"–3/4" and 1"–1-1/2") and KO's for wireless antennae (1/2"). Standard model includes recessed door with vents and key lock (left or right swing). Rear door can be omitted by placing "LRD" (less rear door) suffix in model no.
- **Sides (welded):** Welded side panels with vents at top and bottom.
- **Bottom (open access):** Includes 10-32 threaded grounding stud in corner, 3/8"-16 threaded T-nuts for (optional) leg levelers, and holes for anchor bolts (by others). Opening is 17.88"D x 19.94"W.
- **Closed Top (with vents):** Steel top with two vents.
- **Cable Management:** Laser-cut combination knock-outs in rear.
- **Rack Rails – 21U (fully adjustable):** One pair of 11-ga. steel 10-32 threaded rails on E.I.A. spacing with bi-directional numbered RU increments (rails mount in either direction). Black finish. Clearance from front rail to outside frame (1.75"), from front rail to optional surface-mount door (2.5").
- **Hardware:** Black pilot point screws with captive washers for quick installation. (25)
- **Compliance:** EIA/TIA compliant. RoHS compliant. UL 2416 Listed in U.S.A. and Canada.
- **UL Listed Load Capacity:** 500 lbs. [227 kg]
- **Optional:**
 - **LFD-21:** solid steel front door
 - **LFD-21P:** smoked plexiglass front door
 - **LFD-21FV:** fully-vented front door
 - **LMSB-22:** mobile base
 - **LSB-22:** stationary base
 - **RRD-21:** 21U mounting rails
 - **LL:** leg levelers

a&e specifications

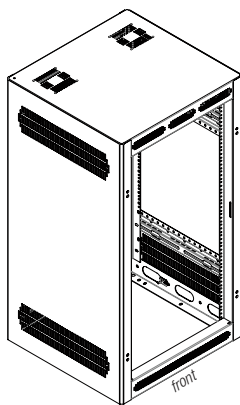


The rack includes a rear door (rear door can be omitted if not needed, see ordering option, pg. 2). A front door is optional, order separately.

The EIA/TIA compliant 19" floor rack shall be Lowell model LER-2122 with overall dimensions of 42.875"H x 22.00"D x 23.06"W; usable height of 21 rack units, and usable depth of 19.34". Rack construction shall be fully welded certified U.S. steel with 16-gauge frame and 14-gauge bottom reinforced at load-bearing junctions, all with black wrinkle powder epoxy finish. Welded sides shall feature vents at top and bottom. The rack shall include a recessed rear door with vents and key lock, laser-cut knockout panels above and below door with 1/2" KO for wireless antennae, 1/2"–3/4" and 1"–1-1/2" EKO for conduit. The front shall feature vents along top and bottom, and provisions to accept an (optional) surface-mount door with left or right hand swing. The closed steel top shall feature two vents. Rack bottom shall have an opening measuring 17.88" x 19.94" and include a grounding stud. Rack shall include 1 pair of (21U) adjustable 11-gauge steel rails tapped 10-32 on 19" E.I.A. spacing with black finish and numbered rack unit increments. The UL 2416 Listed rack shall be manufactured in the U.S.A. with a UL Listed load capacity of 500 lbs.

Optional

- The rack shall include a solid steel surface-mount front door with key lock model LFD-21.
- The rack shall include a smoked plexiglass surface-mount front door with key lock model LFD-21P.
- The rack shall include a fully-vented surface-mount front door with key lock model LFD-21FV.
- The rack shall include mobile base model LMSB-22, which shall add 4.06" to height.
- The rack shall include a stationary base model LSB-22.
- The rack shall include an additional pair of 21U mounting rails model RRD-21.
- The rack shall include a set of four leg levelers model LL.

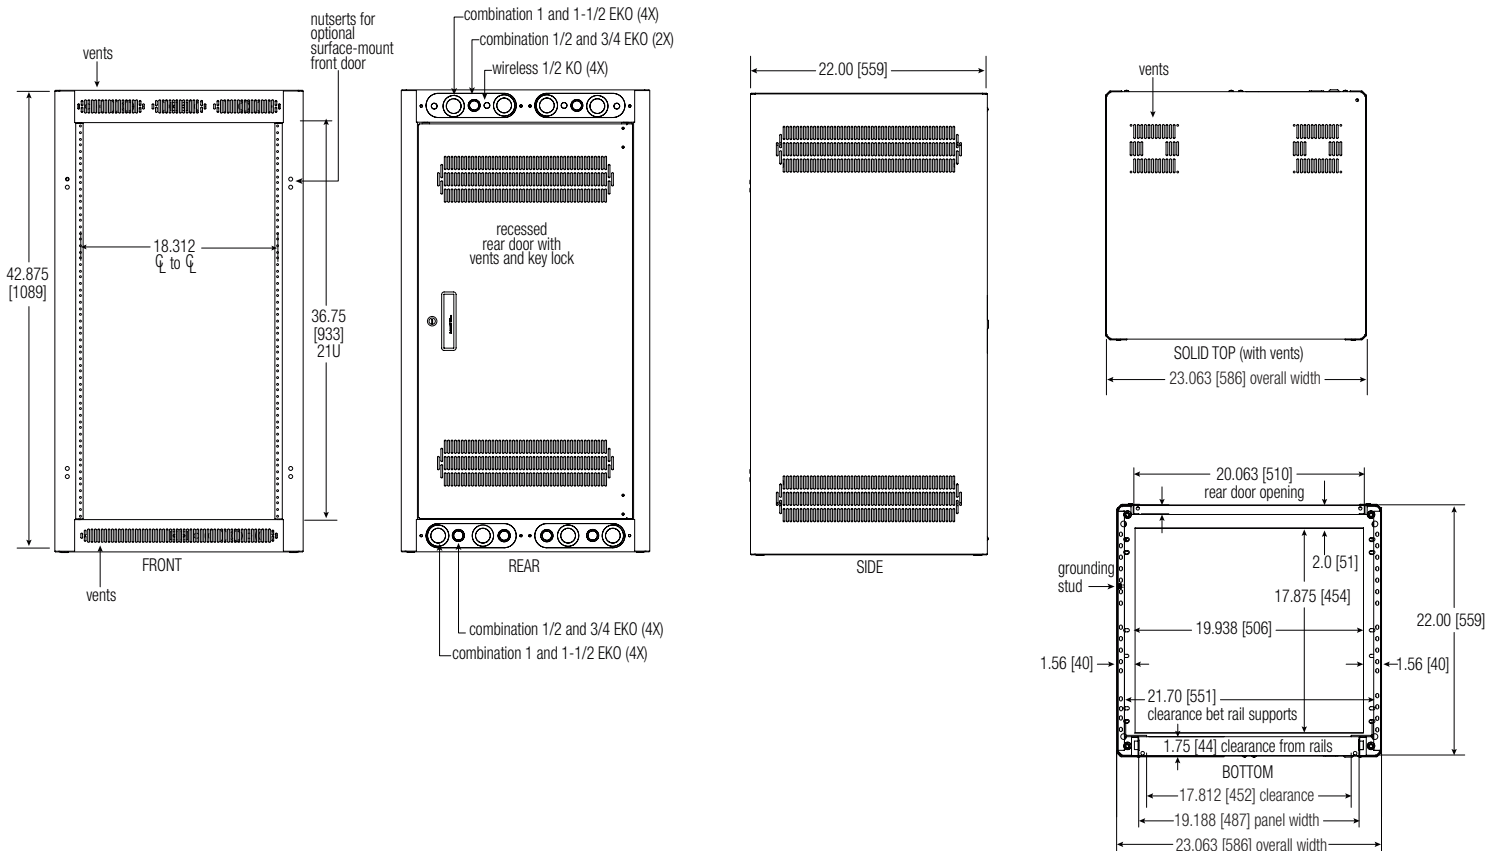

LER series summary

Model No.	Rack Units	Overall Depth	Usable Depth	Overall Height	Usable Height	Overall Width	Top Opening	Bottom Opening Depth	Bottom Opening Width	Adj. Rails
LER-1822	18 U	22.00 [559]	19.34 [491]	37.63 [956]	31.63 [803]	23.06 [586]	---	17.88 [454]	19.94 [506]	1 pr
LER-2122	21 U	22.00 [559]	19.34 [491]	42.88 [1089]	36.75 [933]	23.06 [586]	---	17.88 [454]	19.94 [506]	1 pr
LER-2422	24 U	22.00 [559]	19.34 [491]	48.13 [1222]	42.13 [1070]	23.06 [586]	---	17.88 [454]	19.94 [506]	1 pr
LER-3522	35 U	22.00 [559]	19.34 [491]	67.38 [1711]	61.38 [1559]	23.06 [586]	7 U	17.88 [454]	19.94 [506]	1 pr
LER-4022	40 U	22.00 [559]	19.34 [491]	76.13 [1934]	70.13 [1781]	23.06 [586]	7 U	17.88 [454]	19.94 [506]	1 pr
LER-4422	44 U	22.00 [559]	19.34 [491]	83.13 [2111]	77.13 [1959]	23.06 [586]	7 U	17.88 [454]	19.94 [506]	1 pr
LER-1827	18 U	27.00 [686]	24.34 [618]	37.63 [956]	31.63 [803]	23.06 [586]	---	22.88 [581]	19.94 [506]	1 pr
LER-2127	21 U	27.00 [686]	24.34 [618]	42.88 [1089]	36.75 [933]	23.06 [586]	---	22.88 [581]	19.94 [506]	1 pr
LER-2427	24 U	27.00 [686]	24.34 [618]	48.13 [1222]	42.13 [1070]	23.06 [586]	---	22.88 [581]	19.94 [506]	1 pr
LER-3527	35 U	27.00 [686]	24.34 [618]	67.38 [1711]	61.38 [1559]	23.06 [586]	7 U	22.88 [581]	19.94 [506]	1 pr
LER-4027	40 U	27.00 [686]	24.34 [618]	76.13 [1934]	70.13 [1781]	23.06 [586]	7 U	22.88 [581]	19.94 [506]	1 pr
LER-4427	44 U	27.00 [686]	24.34 [618]	83.13 [2111]	77.13 [1959]	23.06 [586]	7 U	22.88 [581]	19.94 [506]	1 pr
LER-2432	24 U	32.00 [813]	29.34 [745]	48.13 [1222]	42.13 [1070]	23.06 [586]	10 U	27.88 [708]	19.94 [506]	2 pr
LER-3532	35 U	32.00 [813]	29.34 [745]	67.38 [1711]	61.38 [1559]	23.06 [586]	10 U	27.88 [708]	19.94 [506]	2 pr
LER-4032	40 U	32.00 [813]	29.34 [745]	76.13 [1934]	70.13 [1781]	23.06 [586]	10 U	27.88 [708]	19.94 [506]	2 pr
LER-4432	44 U	32.00 [813]	29.34 [745]	83.13 [2111]	77.13 [1959]	23.06 [586]	10 U	27.88 [708]	19.94 [506]	2 pr

Rack dimensions (rounded) – inches and [mm]; 1U = 1.75"

ORDERING OPTION: Omit rear door by adding "LRD" to end of model number, ex. LER-2122-LRD

