




features.

- **Panel Space:** 14U or 24.50" [622]
- **Rack Height:** 28.34" [720]
- **Rack Depth:** 21.00" [533]
- **Rack Width:** 19.21" [586]
- **Description:** Slim open-frame rack for 19" equipment is made to fit where a standard rack may not, such as inside millwork or under a counter. This model ships pre-assembled with the set of installed accessories listed.
- **Rack:**
 - 14-gauge certified U.S. steel frame
 - 11-gauge corner post rails tapped 10-32 with numbered RU increments
 - Smooth black powder epoxy finish
 - Upper and lower front vents
 - Steel top with vents
 - Open sides with multiple obounds
 - Large opening in base (10.50"W x 9.00"D)
 - Combination knockouts (1/2"–3/4") in rear for cable management
- 3/8"-16 threaded T-nuts for (optional) leg levelers
- Load capacity 400 lbs.
- Rack is made in the U.S.A. with certified U.S. steel. EIA/TIA compliant. RoHS compliant.
- **Installed Accessories:**
 - **Utility Shelf:** Rugged two-part shelf with vents. 2U x 15"D x 19"W. Quantity = three (3).
 - **#SVP-2 Vent Panel:** 2U x 19"W vent panel with flange. Quantity = two (2).
 - **#ACS-1506 Power Strip:** 20"L with 6 (15A) outlets, 6' attached cord, and surge suppression. Quantity = one (1).
 - **#CMV3-12 Vertical-Mount Cable Manager:** 12U x 3.25"W steel velcro post tie with round/square holes. Quantity = one (1).
 - **#LVR-C3SFL Casters:** Set of 4 (3") swivel casters (2 locking) with special tread to protect fine floors. Quantity = one set (1).

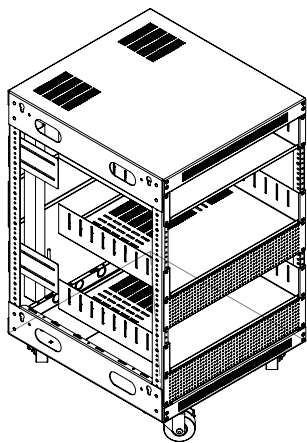

a&e specifications.

The E.I.A. compliant slim frame rack shall be Lowell #LXR-1421-IAV. Rack dimensions shall be 28.34"H x 21"D x 19.21"W, providing panel space of 14 rack units. Construction shall be 14 gauge certified U.S. steel base and top with 11-gauge corner post mounting rails. Rails shall be tapped 10-32 and have numbered rack unit increments. The rack shall be made in the U.S.A. It shall ship assembled with a set of installed accessories including: three (2U) utility shelves, two (2U) vent panels, one 15A power strip with six outlets, one vertical cable management bar, and a set of fine-floor swivel casters (two locking) with fine-floor rubber tread.


LXR--IAV series summary

Model No.	Rack Units	Rack Depth	Rack Height	Usable Height	Rack Width	Bottom Opening Depth	Bottom Opening Width	Corner Post Rails	Side Brackets
▶ LXR-1421-IAV	14 U	21.00 [533]	28.34 [720]	24.50 [622]	19.21 [488]	9.00 [229]	10.50 [267]	4	----
LXR-3021-IAV	30 U	21.00 [533]	56.34 [1431]	52.50 [1334]	19.21 [488]	9.00 [229]	10.50 [267]	4	2
LXR-3821-IAV	38 U	21.00 [533]	70.34 [1787]	66.50 [1689]	19.21 [488]	9.00 [229]	10.50 [267]	4	2

Rack dimensions (rounded) – inches and [mm]; 1U = 1.75"

The LXR --IAV Series slim frame rack is also available unassembled and without accessories (see LXR Series).

Rack Dimensions

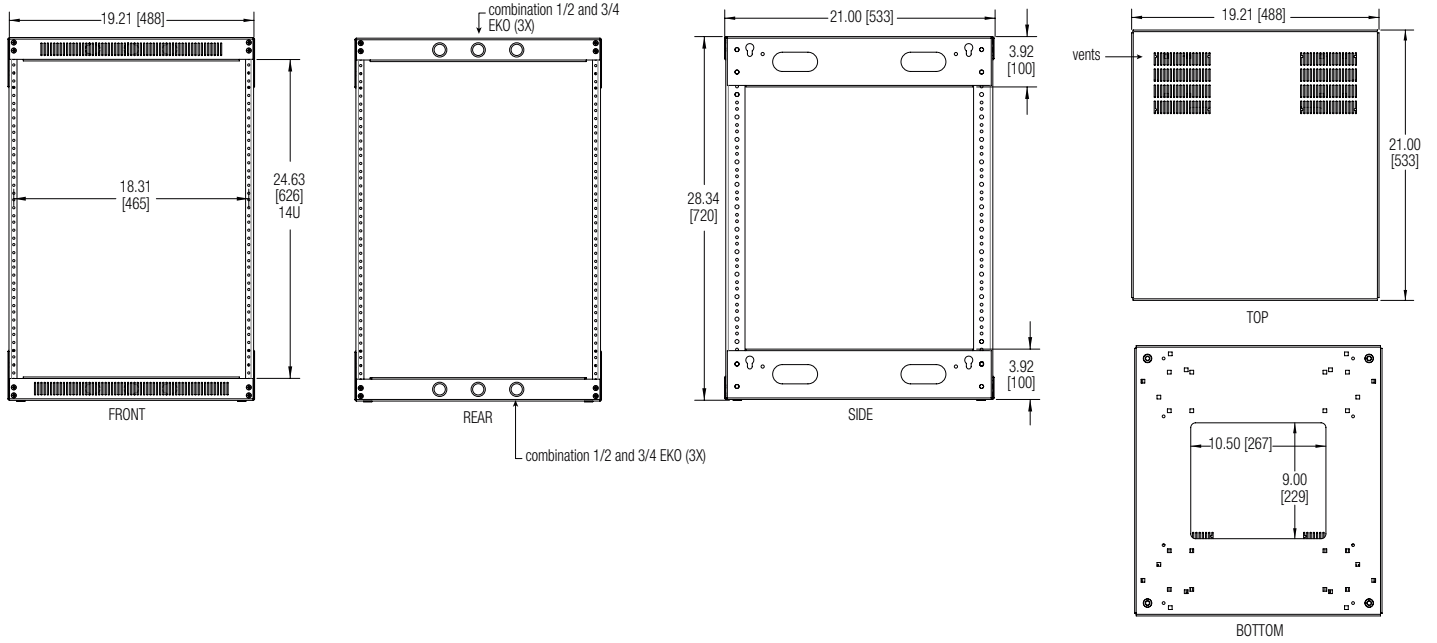

Rack with Installed Accessories

