



Side view

Stereo attenuator volume control is engineered for three types of 70V/100V applications—distributed mono systems, distributed mono systems with subwoofer and distributed stereo systems.

FEATURES:

- Stereo autoformer attenuator with rotary switch
- 150W power rating
- 3dB per step attenuation (33dB total, two steps of 6dB each before off)
- Phoenix style plug-in screw termination strips for pre-wire convenience
- Wire capacity to 14 gauge
- Two-gang stainless steel wall plate, with printing
- Rotary switch — 0-max (10)
- Designed to fit a two-gang E.O. box with minimum depth of 2.5" including mud ring, if used (box not included)
- ETL Listed (to UL 60065)

A&E SPECIFICATIONS:

The ETL Listed stereo autoformer attenuator volume control for distributed mono systems, distributed mono systems with subwoofer or distributed stereo applications shall be Lowell model 150LVCS, with power rating of 150W per channel, 3dB per step attenuation with two positions of 6dB before “off.” The volume control shall have plug-in termination for up to 14-gauge wire for 70V or 100V input connections (from an amplifier), and 70V or 100V output (to a speaker/transformer assembly). It shall include a black rotary knob and a two-gang stainless steel wall plate.

OPTIONS: (order separately)

- P1X-2: Two-gang steel surface box with knockouts, white finish. 4.625"H x 4.625"W x 2.5"D. Includes four U-clips.

150LVCS Series Stereo Attenuator Summary


Model No.	Power Rating	Attenuation *	Type	Switch	Style	Color	For Use With
150LVCS	150W	3dB steps	Auto-trans	Rotary	Standard Wall Plate	SS	70V/100V Speaker Line
150LVCS-DSB	150W	3dB steps	Auto-trans	Rotary	Decorator Wall Plate	SS / Black	70V/100V Speaker Line

* 33dB total; two steps of 6dB each before off


This spec



SCHEMATIC (one channel):

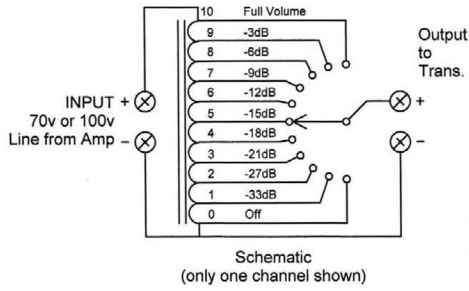


WIRING:

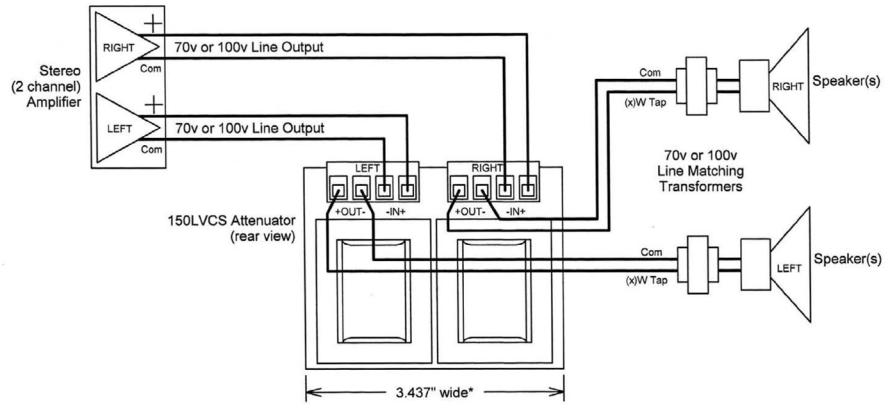


APPLICATIONS:

A) Distributed Mono System

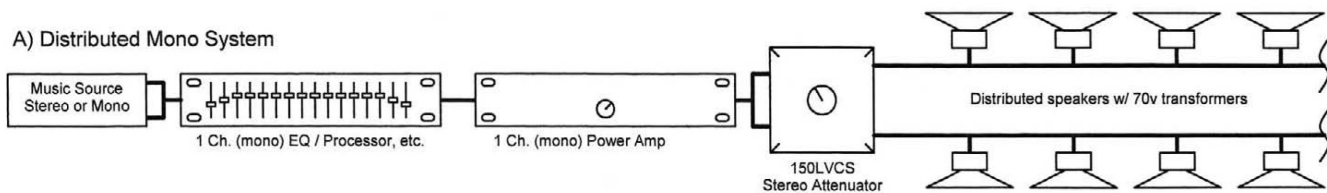

B) Distributed Mono System w/ Subwoofer

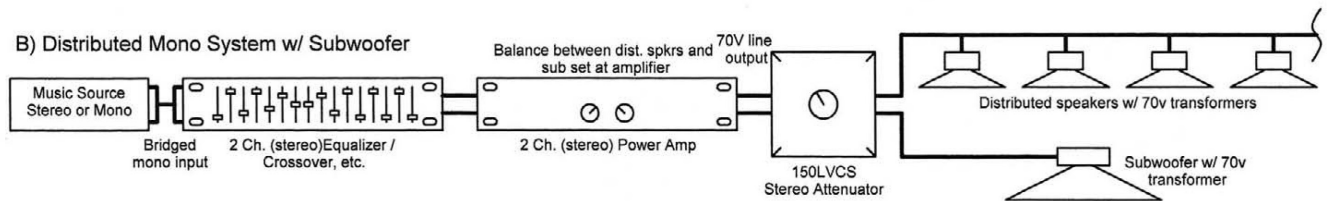

C) Distributed Stereo System

