

### features . . . . .

- **Description:** Provides UPS maintenance bypass with input and output hardwired terminal block connections, ensuring continuous uptime for critical electronics.
- **Bypass Switch:**
  - Manually transfer critical loads from UPS power to utility power using a bypass switch, enabling UPS repair or replacement without power interruption to the load.
  - Transfer back to protected UPS power by returning bypass switch to the UPS position.
  - Bypass switch provides transfer within 8ms
- **Simplifies UPS repair and replacement:** Reduces costly downtime.
- **Hardwired:** Utility input and system output.
- **Terminal Block Connections:** Provides input and output terminal block connections for connection to utility and load.
- **Simple to Operate:** LED indicators verify availability of UPS and utility sources.
- **Power Distribution:** Features six (6) 5–15R output receptacles.
- **Surge Protection:**
  - Loads are surge protected even when UPS is in bypass mode.
  - UPS electronics are protected during normal operation.
- **Flexible Mounting:** Includes wall and rackmount hardware.
- **Power Rating:** 120VAC / 20A
- **Warranty:** 3 years limited warranty

### a&e specifications . . . . .


The UPS shall include a hardwired bypass module, Lowell model #UPS-XBDM-20RHW. The module shall have input and output hardwired terminal block connections to allow manual transfer of

critical loads from UPS power to utility power, and back again, using a bypass switch.

### instructions . . . . .

User manual is available for download at [www.LowellMfg.com](http://www.LowellMfg.com)

### operation

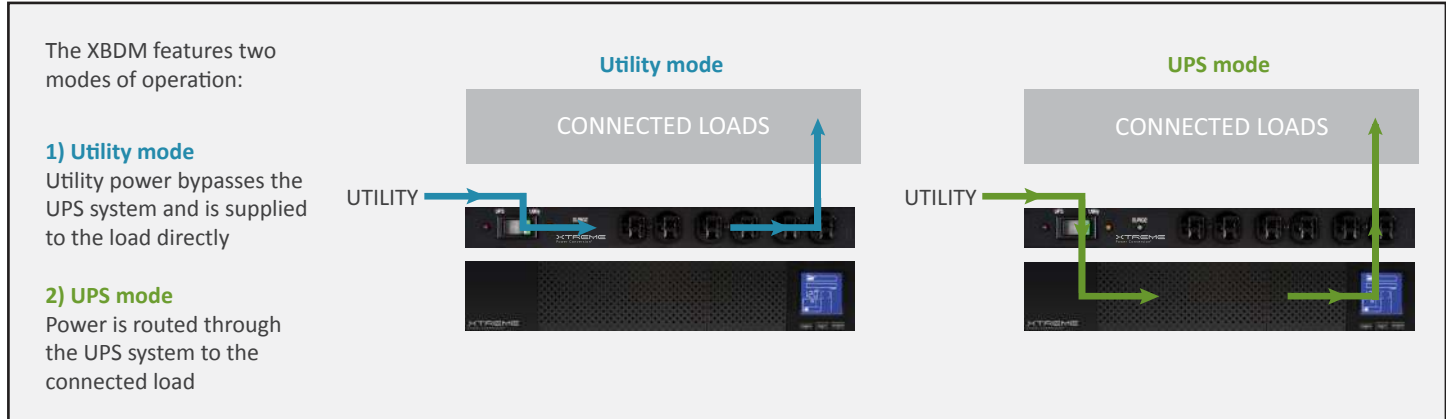

### technical specifications

Lowell Model No.		UPS-XBDM-20RHW
POWER RATING	Voltage/current	120VAC/20A
INPUT	Utility input	Hardwired terminal block
OUTPUT	Output	Hardwired terminal block + (6) 5-15R
TRANSFER SWITCH	Capacity	20A break before make rocker switch
	Transfer time	8ms
UPS INPUT	Input connection	5-20R
UPS OUTPUT	Connection to UPS output	3 ft cord with 5-20P plug
AC SURGE	Capacity	6500A, 114J, 330VAC
INDICATORS	LED indicators	Utility, surge, UPS
PHYSICAL	Dimensions (W x D x H)	17 x 3.5 x 1.75 in
	Weight	3.6 lbs
WARRANTY	---	3 years (USA and Canada)