



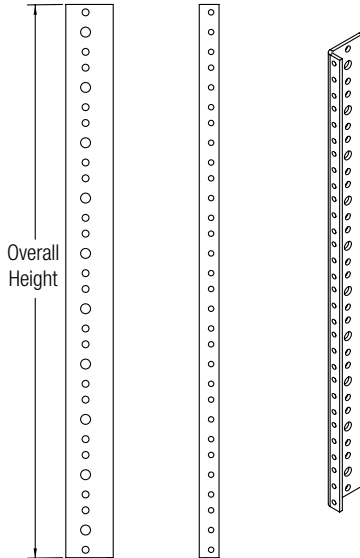

LLR-RRT series rails are tapped to accept threaded 10-32 screws (LLR-RRT-21 shown).



LLR-RRT rack rails for LLR Series laminate racks. The rack rails accept threaded 10-32 screws and feature a printed scale showing rack unit increments to aid set-up. The 1U position should be placed at the bottom of the rack to facilitate consistent loading of equipment.

### FEATURES

- For use with Lowell LLR Series
- 11-gauge U.S. steel
- Fixed hole positions
- Black powder epoxy finish
- Made in the USA with 100% certified US steel
- Printed RU increments to aid equipment mounting
- Includes mounting hardware
- Sold in pairs

### A & E SPECIFICATIONS

The LLR rack shall include an extra pair of mounting rails, Lowell Model LLR-RRT-\_\_\_\_ (10, 12, 16, 21). The rails shall be fabricated from 11-gauge U.S. steel and have a black powder epoxy finish. Each rail shall measure \_\_\_\_ (10, 12, 16, 21) rack units, be tapped on one side to accept threaded 10-32 screws, and feature a printed scale showing rack unit increments.

### LLR-RRT SERIES SUMMARY

Model No.	Description	Hardware Included	Overall Height in [mm]	RU	Quantity
LLR-RRT-10	Mounting Rails for LLR Series rack, thin-flange	Y	17.50 [445]	10U	1-pr.
LLR-RRT-12	Mounting Rails for LLR Series rack, thin-flange	Y	21.00 [533]	12U	1-pr.
LLR-RRT-16	Mounting Rails for LLR Series rack, thin-flange	Y	28.00 [711]	16U	1-pr.
LLR-RRT-21	Mounting Rails for LLR Series rack, thin-flange	Y	36.75 [933]	21U	1-pr.

One rack unit (RU or U) = 1.75 inches or 44.45 mm.

