



Volume control includes a decorator style wall plate with sliding bar.



Mono autoformer attenuator-style volume control provides precise level adjustment of (25V/70V/100V) single or multiple speaker lines. Includes priority relay for emergency signal bypass and wall plate with sliding bar switch to meet ADA requirements.

### FEATURES:

- 100W power rating
- 3dB per step attenuation with two positions of 6dB before “off”
- Priority Relay: 24VDC@15mA relay for applications requiring ability to override volume control with an emergency page or signal.
- Connection: Phoenix style plug-in screw termination strips for prewire convenience.
- Wire capacity up to 14-gauge
- One-gang white decorator-style wall plate with sliding bar switch. ADA compliant \*
- Dimensions: 2.75" x 4.5" x 2.375"
- Third Party Certification: ETL Listed in U.S.A. and Canada (to UL 60065)
- Installation: Mounts in a standard one-gang E.O. box with minimum depth of 2.375" (order separately).


### A&E SPECIFICATIONS:

The ADA compliant volume control attenuator with one-gang decorator style wall plate and sliding bar switch shall be Lowell SVC100-PA-DW. It shall feature 100W power rating, 3dB per step attenuation (6dB per step in last two positions before off), and a 24VDC@15mA relay for emergency/paging signals to bypass/override the attenuator. It shall include a decorator style one-gang wall plate with white finish. The device shall be designed to fit an E.O. box with minimum inside dimensions of 1.875"W x 2.688"H x 2.375"D.

### OPTIONS: (order separately)

- P1X: Surface-mount one-gang wall box (4.625" x 2.875" x 2.5") fits standard devices. Steel with half-inch knockouts, white finish. Includes U-clips.

\* Americans with Disabilities Act compliant with required activation force less than 5 lbf (ft. pounds). See ADA Accessibility Guidelines Sec. 4.27.4 online at [www.access-board.gov](http://www.access-board.gov)

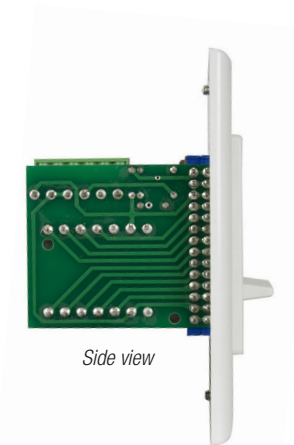


Side view


### Model Summary

Model No.	Power Rating	VC Type	Priority Relay	Switch Style	Switch Positions	Attenuation Step / Total	Wall Plate Style	Wall Plate Color
SVC100-PA-DW	100W	auto-trans	yes	sliding bar	10-Off	3dB/33dB*	decorator 1-gang	white

\* Two steps of 6dB each before “Off”

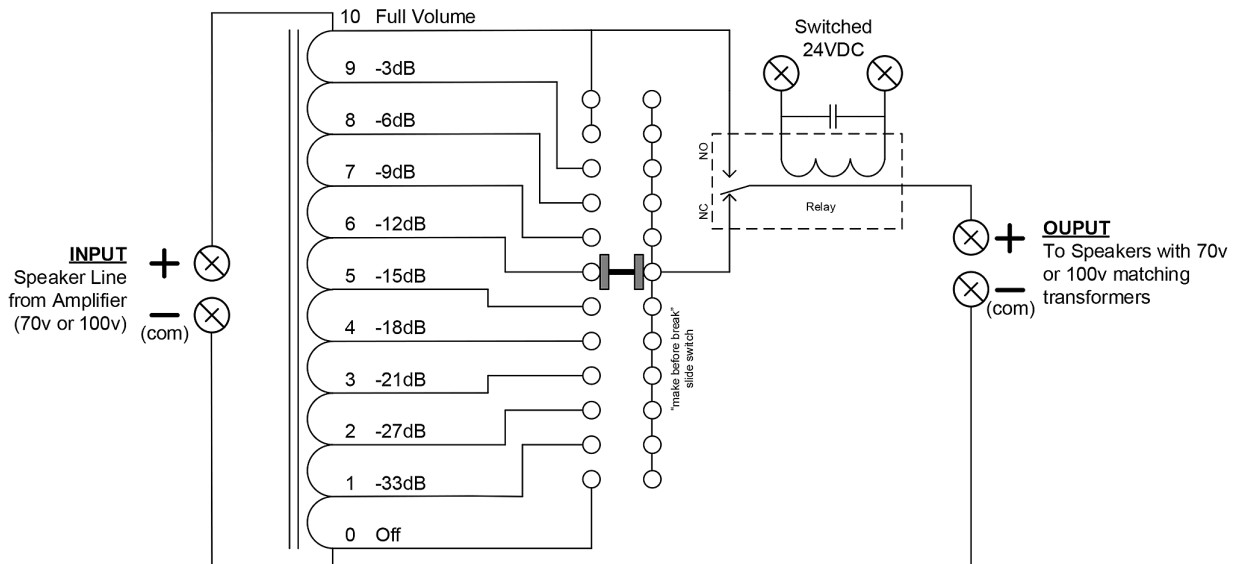

**Schematic**

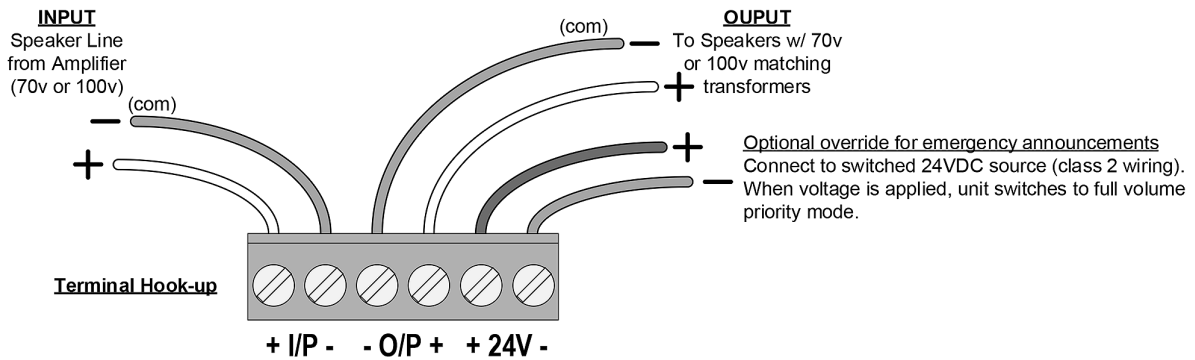

Dimensions are inches and [mm] unless stated otherwise.

